

LANDSCAPE SPECIFICATIONS:

ALL SOD SHALL CONFORM TO THE STANDARDS OF THE NURSERY SOD GROWERS ASSOCIATION OF ONTARIO. ALL SODDED AREAS SHALL BE PREPARED WITH A MINIMUM OF 300MM OF TOPSOIL AND SODDED WITH #1 BLUEGRASS - FESCUE NURSERY SOD. ON SLOPES, LAY THE TURF PIECES HORIZONTALLY ACROSS THE SLOPE, STARTING AT THE BOTTOM. FOR AREAS WITH A 2:1 SLOPE OR GREATER STAKE SOD TO HOLD IN PLACE WITH 1/2" X 1" X 12" PEGS AT TWO-FOOT SPACINGS.

UNLESS SOIL TESTS SUGGEST OTHERWISE, FERTILIZER SHALL BE APPLIED AS FOLLOWS: SODDED AREAS: 11-8-4 (11% NITROGEN, 8% PHOSPHOROUS, 4% POTASH) AT 4.5 KG/M2. PLANTING BEDS: 7-7-7 (7% NITROGEN, 7% PHOSPHOROUS, 7% POTASH) AT 0.12 KG/M3, AND BONE MEAL AT 0.58 KG/M3 OF PLANTING SOIL MIXTURE AS OUTLINED BELOW.

ALL PLANTING BEDS ARE TO BE CONTINUOUS, AND EXCAVATED TO A MINIMUM DEPTH OF 450MM UNLESS NOTED OTHERWISE. PLANTING BEDS ARE TO BE FILLED WITH A SOIL MIXTURE COMPOSED OF 50-60% SAND, 20-40% SILT, 6-10% CLAY, AND 2-5% ORGANIC IN ADDITION TO THE FERTILIZERS SPECIFIED ABOVE, WITH A PH OF 7.5 OR LESS. NATIVE ON-SITE SOILS MAY BE UTILIZED BUT MUST BE TESTED FROM A RECOGNIZED LABORATORY TO DETERMINE IF ANY AMENDMENTS ARE REQUIRED.

ALL PLANT MATERIAL SHALL CONFORM TO THE STANDARDS OF THE CANADIAN NURSERY AND LANDSCAPE ASSOCIATION. ALL PLANT MATERIAL IS TO BE CLAY GROWN STOCK. INSTALL ALL PLANT MATERIAL AS SHOWN ON THE PLANTING PLAN AND DETAILS. USE ONLY VIABLE NURSERY STOCK GROWN IN STRICT ACCORDANCE WITH PROPER HORTICULTURAL PRACTICES WHICH IS FREE FROM DAMAGE, PESTS, AND DISEASE.


ALL BEDS ARE TO BE COVERED WITH A 100MM DEPTH OF CLEAN, SHREDDED PINE BARK MULCH BY GRO-BARK OR APPROVED EQUAL. UNLESS NOTED OTHERWISE, TRANSPORTATION, HANDLING, STORAGE AND PLANTING ARE TO COMPLY WITH THE GUIDELINES SET OUT BY THE LANDSCAPE ONTARIO HORTICULTURAL TRADES ASSOCIATION. GUYING AND STAKING OF TREES SHALL CONFORM TO THE PLANTING DETAILS.

THE CONTRACTOR WILL OBSERVE PROPER MAINTENANCE PROCEDURES FOR ALL NEWLY CONSTRUCTED LANDSCAPE WORK AS PER CHAPTER 16 (LANDSCAPE MAINTENANCE) OF LANDSCAPE ONTARIO HORTICULTURAL TRADES ASSOCIATION GUIDELINES. UNLESS OTHERWISE NOTED, THIS WILL APPLY DURING THE CONSTRUCTION PERIOD ONLY. THE CONTRACTOR SHALL MAINTAIN ALL PLANTING AND SODDING UNTIL FINAL ACCEPTANCE IS GRANTED BY THE LANDSCAPE ARCHITECT.


THE CONTRACTOR WILL BE RESPONSIBLE FOR THE PROTECTION OF ALL PLANT MATERIAL FROM DAMAGES RESULTING FROM WINTER CONDITIONS AS WELL AS RODENTS DURING THE WARRANTY PERIOD. APPLY "SKOOT" RODENT DETERRENT FORMULA (OR APPROVED EQUAL) TO ALL CONIFEROUS TREES AND ALL SHRUBS IN LATE OCTOBER AS PER MANUFACTURER'S DIRECTIONS.

THE CONTRACTOR SHALL PROVIDE A FULL ONE YEAR GUARANTEE (OR TWO YEARS IF REQUIRED BY THE MUNICIPALITY OR OWNER) ON ALL LANDSCAPE WORKS, BEGINNING ON THE DATE THAT FINAL ACCEPTANCE IS GRANTED BY THE LANDSCAPE ARCHITECT.


1 LANDSCAPE SPECIFICATIONS
L-2 N.T.S.

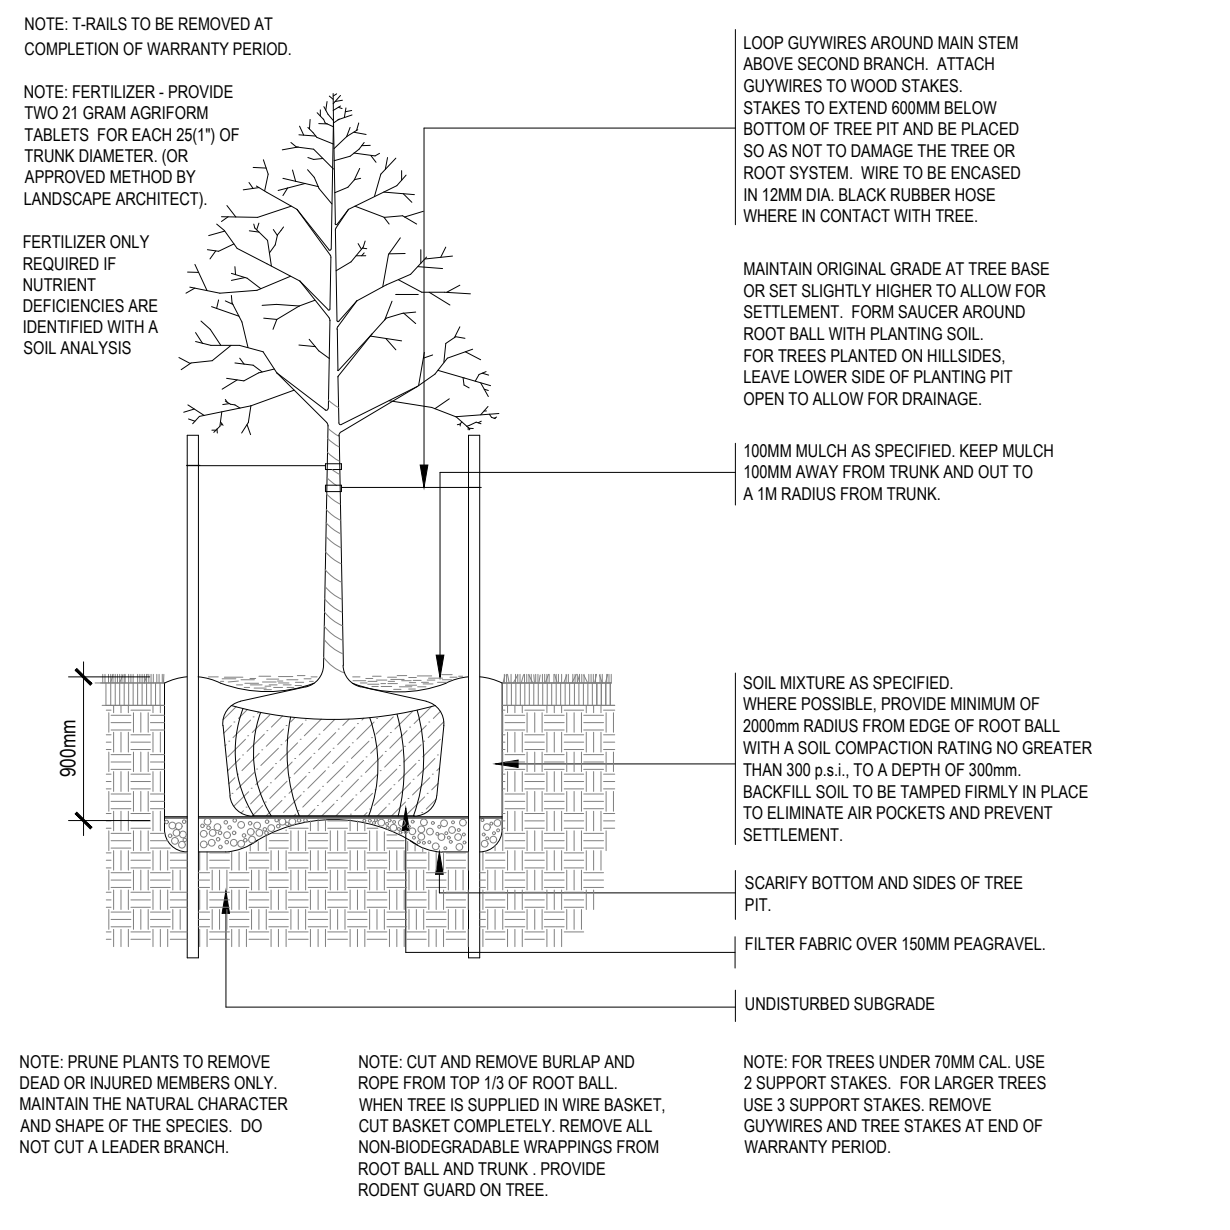

2 DECIDUOUS TREE PLANTING DETAIL
L-2 N.T.S.

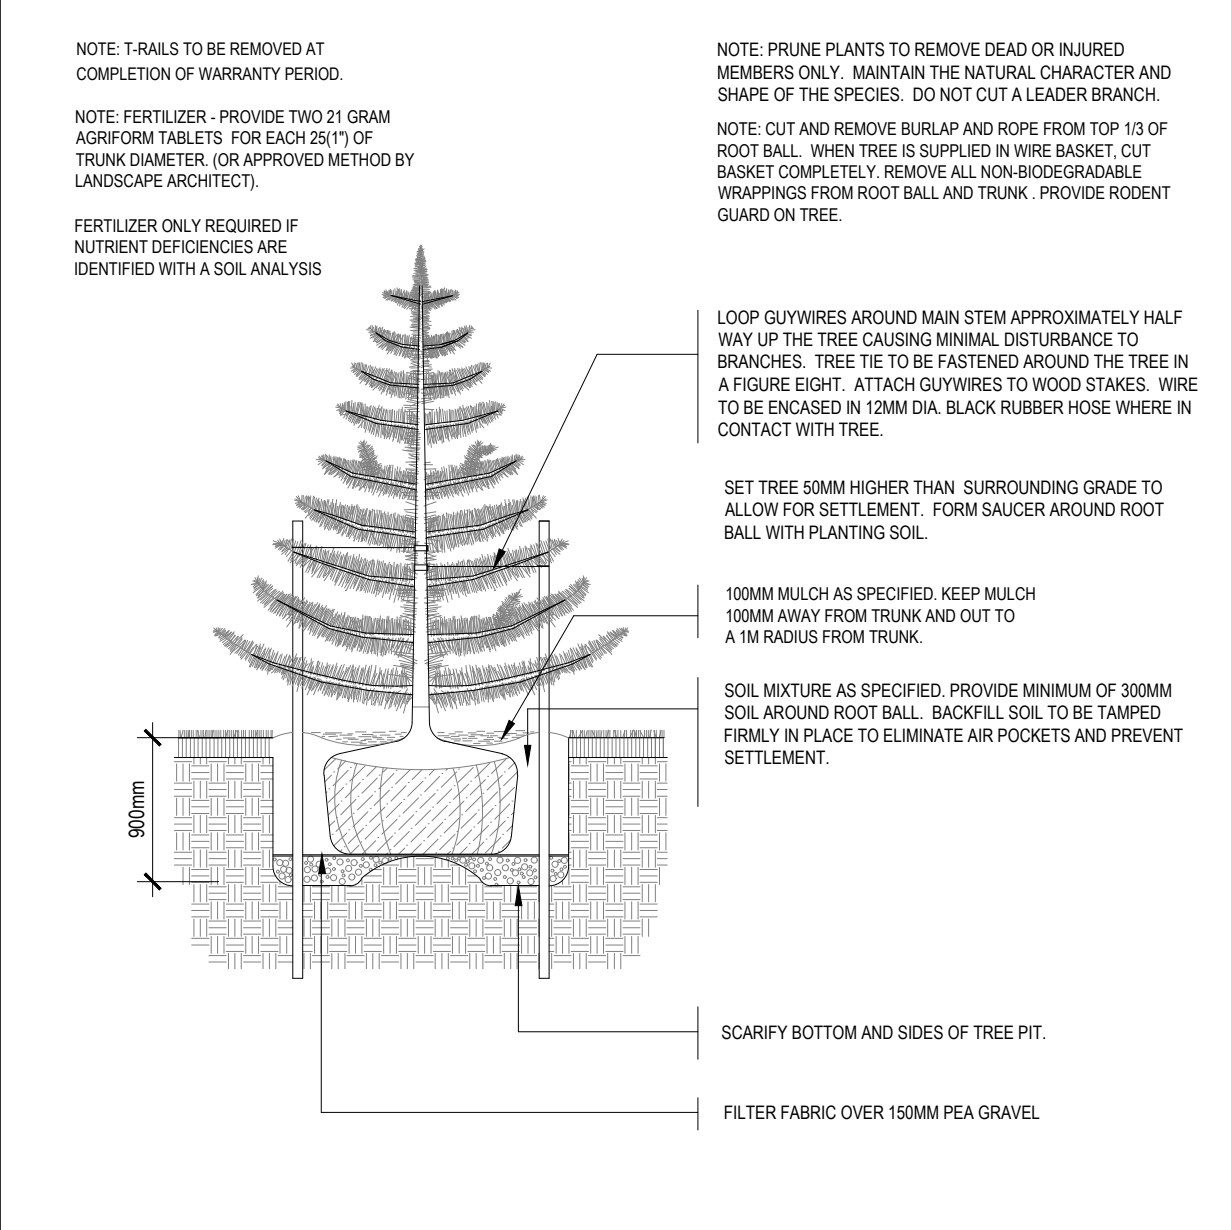


3 CONIFEROUS TREE PLANTING DETAIL
L-2 N.T.S.

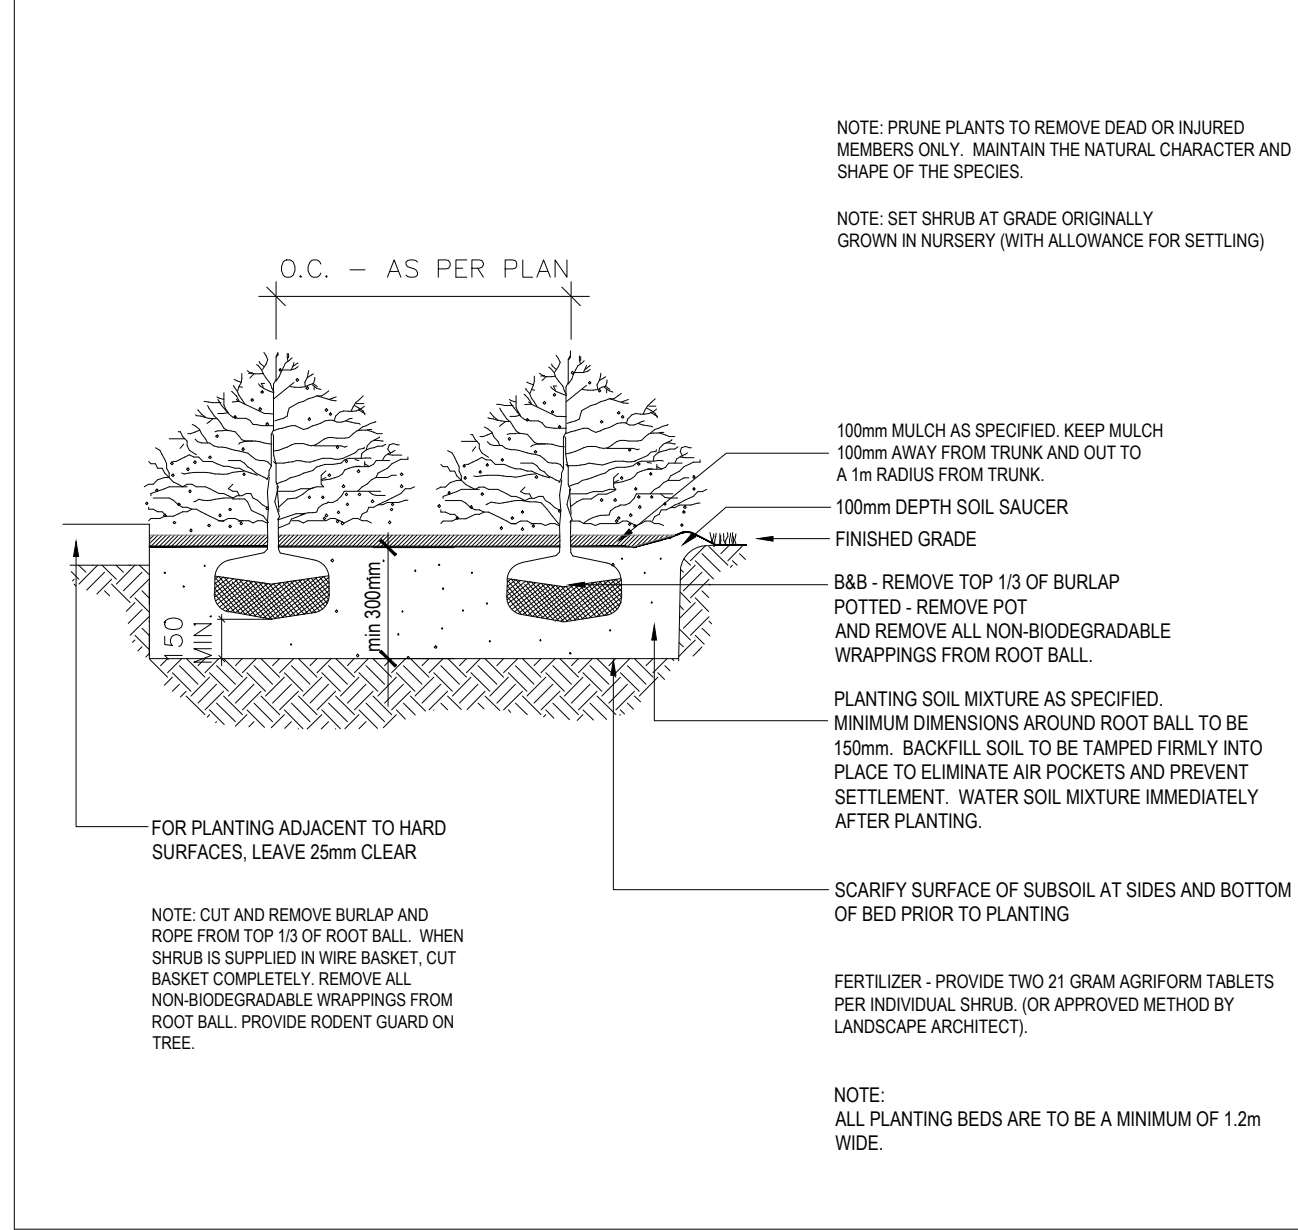


4 SHRUB PLANTING DETAIL
L-2 N.T.S.

- Notes**
- Do not scale the drawings. All dimensions are in millimetres unless noted otherwise.
 - This drawing is to be read in conjunction with the site plan and architectural drawings prepared by the Architect, and engineering drawings prepared by the Civil, Mechanical, and Electrical Engineers.
 - The contractor shall check and verify all existing and proposed grading and conditions on the project and immediately report any discrepancies to the consultant before proceeding with any work.
 - The contractor is to be aware of all existing and proposed services and utilities. The contractor is responsible for having all underground services and utility lines staked by each agency having jurisdiction prior to commencing work.
 - This drawing is to be used for development approval only. For layout of all work refer to construction drawings.
 - Plant quantities indicated on the plan supercede the quantities from the plant list (report any discrepancies to the landscape architect).
 - Do not leave any holes open overnight.
 - Keep area outside construction zone clean and usable by others at all times. Contractor shall thoroughly clean areas surrounding the construction zone at the end of each work day.
 - Contractor to make good any and all damages outside of the development area that may occur as a result of construction at no extra cost.

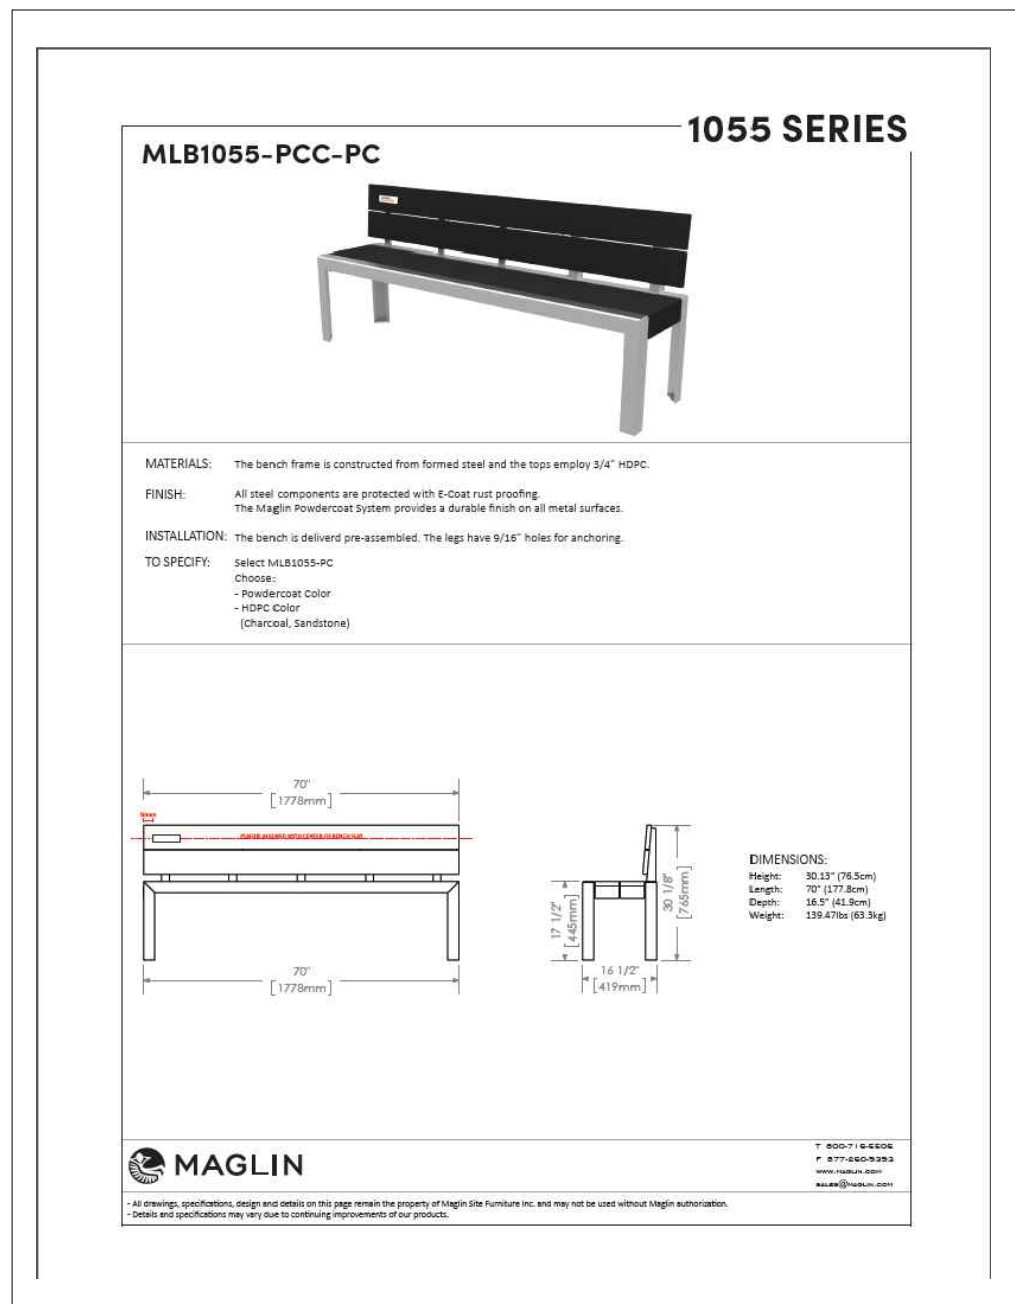

5 BENCH
L-2 N.T.S.

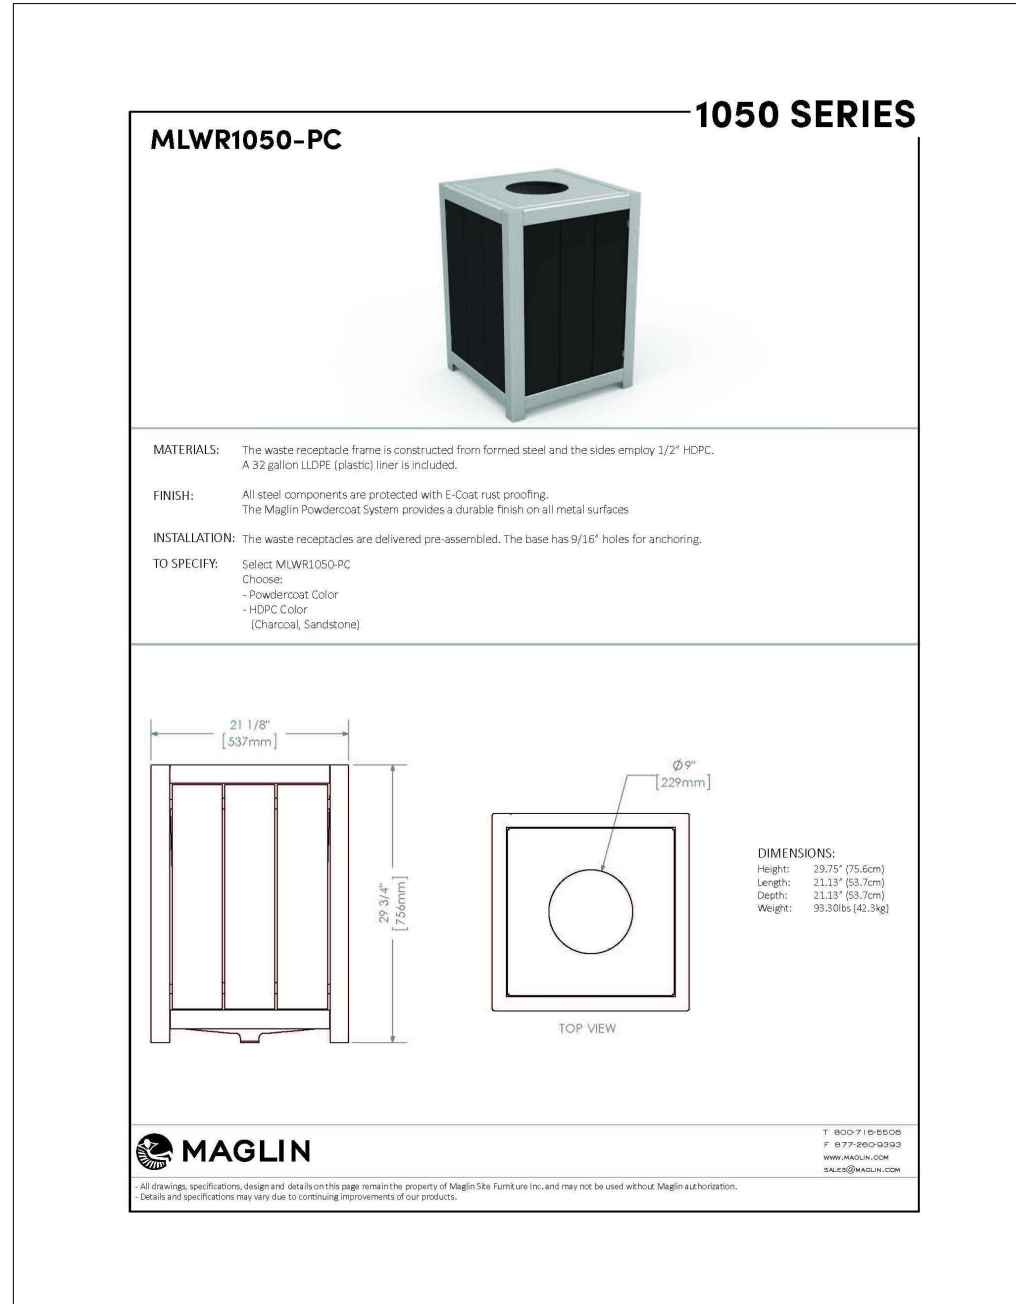

6 WASTE RECEPTACLE
L-2 N.T.S.

2	November 4, 2024	Issued For SPA	PD
1	October 3, 2024	Issued For Review	PD
Revision No.	Date	Issued / Revision	By

PLANNING URBAN DESIGN & LANDSCAPE ARCHITECTURE

MHBC

230-7030 WESTON ROAD WOODBRIDGE, ON, L4L 6G7 | P: 905 761 5598 F: 905 761 5599 | WWW.MHBCPLAN.COM

Stamp		Date	November 2024
Drawn By		Plan Scale	
File No.	24242 A	Checked By	G. C.
Region's File #		Project	
File Name	LANDSCAPE DETAILS	Dwg No.	L2