
## **GENERAL NOTES:**

- 1- THE APPLICATION OF THIS FOUNDATION SYSTEM AS SHOWN MAY RESULT IN UNEVEN MOVEMENT OF THE STRUCTURE, WHICH MAY ADVERSELY AFFECT THE OPERATION OF DOORS AND WINDOWS.
- 2- WOOD SILL PLATE FASTENED TO FOUNDATION WALL WITH MIN. 1/2" DIA. ANCHOR BOLTS A MIN. 4" INTO CONCRETE @ 7'-10" O.C MAX WITH WITH GASKET BETWEEN PLATE AND CONCRETE
- 3- CONCRETE SHALL BE 32 MPa @ 28 DAYS WITH 5%-8% AIR ENTRIANMENT
- 4- ROCK OR COMPACTED GRADULAR FILL.
  REMOVE TOPSOIL AND ALL ORGANIC MATERIAL.
  FOOTINGS SHALL REST ON UNDISTURBED SOIL.

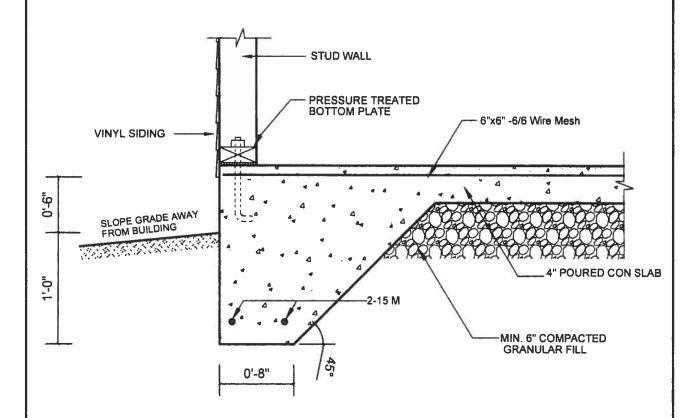

TYPICAL SLAB ON GRADE FOUNDATION DEAILS FOR DETACHED SINGLE STOREY WOOD FRAM ACCESSORY BUILDING, AS PER OBC. 9.12.2.2.

MAX. 592 sq.ft. (55 sq.m.)